
Multiplatform FOBWDM™ Embedded Antenna

Lockheed Martin - General Electric Shared Vision Program

14 to 4 Antenna Reduction

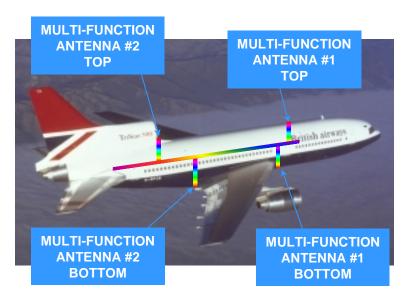

12 to 2 Radio Reduction

WDM for Military Applications DARPA Industry Day April 18, 2000

John Soderberg Lockheed Martin Aeronautics - Marietta 770-494-5748 john.j.soderberg@lmco.com Sandy Feldman, PhD GE Corporate Research and Development 518-387-6848 feldman@crd.ge.com

maintaining the data needed, and of including suggestions for reducing	llection of information is estimated to completing and reviewing the collect this burden, to Washington Headqu uld be aware that notwithstanding ar OMB control number.	ion of information. Send comments arters Services, Directorate for Information	regarding this burden estimate mation Operations and Reports	or any other aspect of th , 1215 Jefferson Davis l	is collection of information, Highway, Suite 1204, Arlington
1. REPORT DATE 18 APR 2000		2. REPORT TYPE N/A		3. DATES COVERED	
4. TITLE AND SUBTITLE	5a. CONTRACT NUMBER				
Multiplatform FO	5b. GRANT NUMBER				
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) GE Corporate Research and Development				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAIL Approved for publ	LABILITY STATEMENT ic release, distributi	on unlimited			
	OTES OM for Military Pla contains color imag	· -	eld in McLean, V	A on April 1	8-19, 2000, The
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFIC	17. LIMITATION OF	18. NUMBER	19a. NAME OF		
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	- ABSTRACT UU	OF PAGES 4	RESPONSIBLE PERSON

Report Documentation Page

Form Approved OMB No. 0704-0188

Overview

- **Program Goals**
- **Program Benefits**
- **Technology Overview**
- **Development Needs**

OF THIS MATERIAL DOES NOT IMPLY DEPARTMEN SE INDORSEMENT OF FACTUAL ACCURACY OR OPIN

Program Objective

Use FOBWDM™ to reduce 14 antennas to 4 multiband antennas and 12 radios to 2 WITS™ compliant digital multichannel radios, while enhancing existing performance and reducing antenna system cost, size and weight.

Replace coaxial cable and legacy stovepipe radios with an integrated fiber solution.

* FOBWDM™ is a trademark of LM Aero-Marietta; Registration application filed

** WITS™is a trademark of Motorola

(The WITS™ radio is planned to be JTRS compliant)

Program Benefits



- Reduce weight.
- Reduce time and complexity to "wire" the airframe.
- Reduce total lifetime costs.
- Improve overall system performance by replacing legacy stovepipe radios and antennas with an integrated, reprogrammable radio and multiband antenna solution.


APPROVED FOR PUBLIC RELEASE, DISTRIBUTION UNLIMITED

REVIEW OF THIS MATERIAL DOES NOT IMPLY DEPARTMENT OF DEFENSE INDORSEMENT OF FACTUAL ACCURACY OR OPINION

Technology Summary

REVIEW OF THIS MATERIAL DOES NOT IMPLY DEPARTMENT OF DEFENSE INDORSEMENT OF FACTUAL ACCURACY OR OPINION

- Transmit analog RF communication signals on optical fiber.
- WDM provides individual addressing for each antenna and radio.

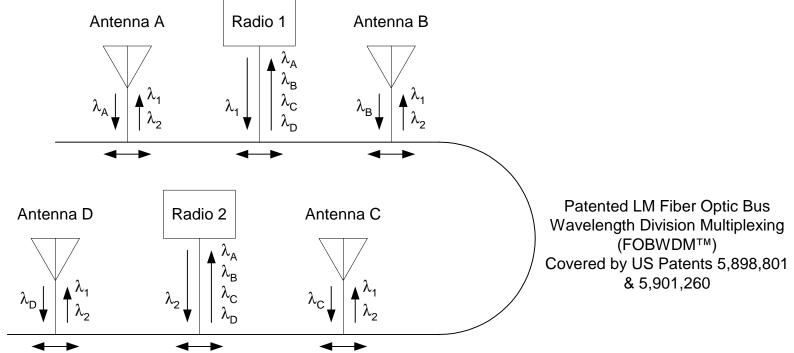

 This diagram assumes that the entire RF band can be covered using a single modulator. If multiple modulators are used, the number of necessary wavelengths increases. Digital control channels, which place further demands on the mux-demux are not shown.

THIS MATERIAL DOES NOT IMPLY DEPARTMEN DORSEMENT OF FACTUAL ACCURACY OR OPIN

Technology Needs

Electro-Optic Modulators

- Cover entire RF bandwidth from 2 MHz to 2 GHz (JTRS specification) with a single optical channel at wavelengths on the ITU grid.
- Specifications for packaged electro-optic modulator:
 - + Dynamic Range: as much as possible; minimum 110 dB-Hz^{2/3} (electrical)
 - + Noise Figure: as low as possible; maximum 17 dB (electrical)
- Any linearized modulation scheme, internal or external, is an acceptable solution.
- 0 dB loss in optical subsystem.

Want it all - with no trades

Technology Needs WDM Components

DEFENSE INDORSEMENT OF FACTUAL ACCURACY OR OPINION

- Performance specifications for MUX / DEMUX
 - + Very flat passband (and/or "no-chirp" lasers): can't afford to impose amplitude modulation due to chirp - frequency drift of laser combined with varying transmission through WDM components. Components must maintain these specifications at aircraft temperatures or be temperature stabilized to withstand the aircraft environment.
 - + Deep band rejection to avoid crosstalk: 40 dB (optical) minimum. Band rejection needs increase as e-o modulation capabilities improve.
- Tunable WDM mux / demux, filters and lasers.
- Rugged, gain-compensated fiber amplifiers, suitable for mixed analog and digital signals.

Off the direct path of digital telecommunications development

GE Corporate R&D LOCKHEED MARTIN

Military Application Challenges

- Environmental: components must survive and operate under aircraft temperature and vibration conditions. Mil Standard 810E is a minimum.
- Size issues include module footprint and bend radii on fiber pigtails.
- Manufacturability: "Handwork" keeps prices high and availability low for applications with small- or mediumscale deployments.